

SMD TERMINAL SERIES – WITHSPRING



Production Code : 451 SMD
*Order No: Page 3

4 mm



SMD terminals which are used in the lighting sector, are specially designed for LED systems (items with/without spring) and provide optional solutions in LED strips. It is available with or without spring and suitable for 0,5 – 1 mm² cable sections.

- Pin range : 4 mm
- Voltage : 250 V
- Current : 5 A

TECHNICAL DATA

Dimensions

| | |
|-------------------|----------|
| Width | 11,42 mm |
| Height | 4,50 mm |
| Depth | 4,10 mm |
| Pin range | 4 mm |
| Pin thickness | - |
| Pin hole diameter | - |

Technical data


| | |
|---------------------|---------------------------|
| Current | 5 A |
| Voltage | 250 V |
| Cable cross section | 0,5 – 1,5 mm ² |
| Screw size | - |
| Nominal torque | - |
| Flammability rating | V0 |
| Coating | µ3+AG |

GENERAL ORDERING DATA


| | |
|-------------------|---|
| Type | Smd Terminal Series With Spring Single |
| Color | Natural |
| Order No | 49.100 |
| Qty | 1000 pcs |
| Product data | 5 A /250 V / 0,5 – 1 mm ² / 4 mm |
| Package weight | 0,25 kg |
| Packaging | Box |
| Min. Order Qty | 1000 pcs |
| Country of origin | TURKEY |

DRAWINGS/DIAGRAM

Drawings

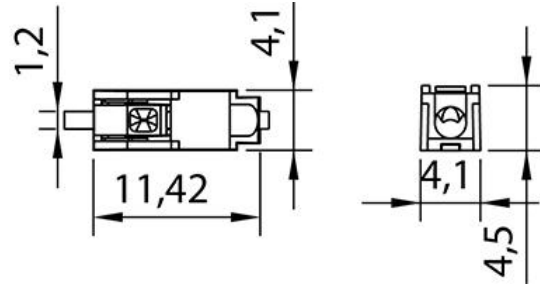

Diagram



CERTIFICATES

| CERTIFICATE | ISSUED BY |
|-----------------------|--|
| TS 10487 EN 60998-2-1 | TSE |
| CE | SZUTEST TECHNICAL INSPECTION AND CERTIFICATION SERVICES CO. LTD. |
| RoHS | İNTERTEK TEST HİZMETLERİ A.Ş. |